



粉块打散破块筛网型

- 筛网规格1-25mm
- 可更换式锯齿桨轮和筛网机构，均匀度更好
- 标配双侧检修孔，便于清洁内部机构
- 桨叶和筛网间隙可调
- 标配方口法兰
- 适用温度 250℃
- 本体材质：不锈钢、碳钢
- 适用于防爆区域




LUMP BREAKER FOR POWDERS CHUNK

- Screen size 1-25mm
- Replaceable sawtooth blade and screen, better uniformity
- Large inspection access doors for easy and efficient cleaning
- Fully adjustable gap between rotor and paddles
- Suitable for differential pressure up to 1.0bar
- Temperature range: up to 250℃
- Materials of construction: stainless steel or carbon steel
- Square flange
- Air purge seal
- Usable in Ex-zone



处理能力与粉块含水量和筛网网孔规格相关
The effective throughput depends on the product properties as well as the basket and screen assembly

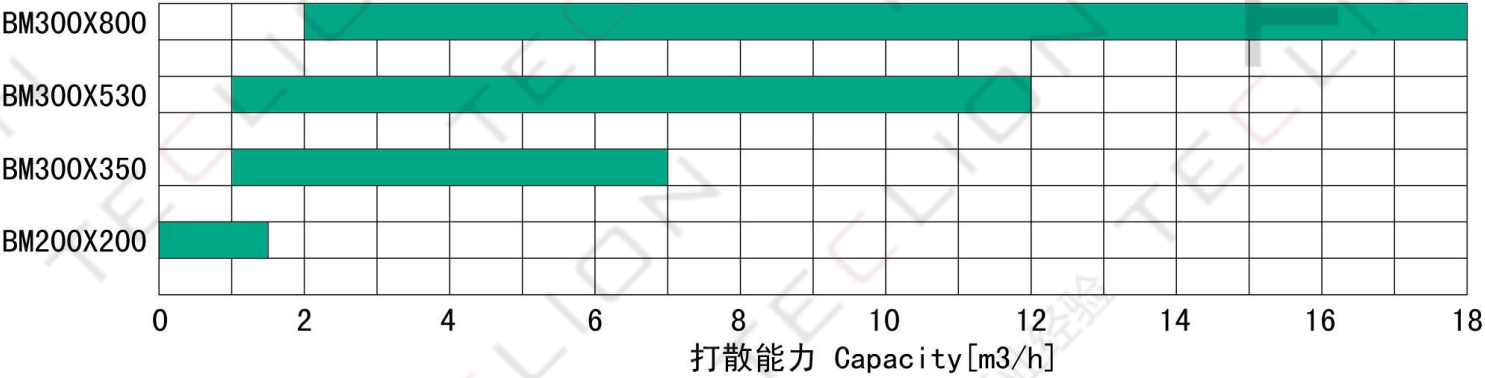


特殊配置

- 打散机构喷涂碳化钨
- 可配轴端测速传感器
- 轴端气封

OPTIONS AND ACCESSORIES

- Wear protection
- Speed sensor
- Gas purge seal

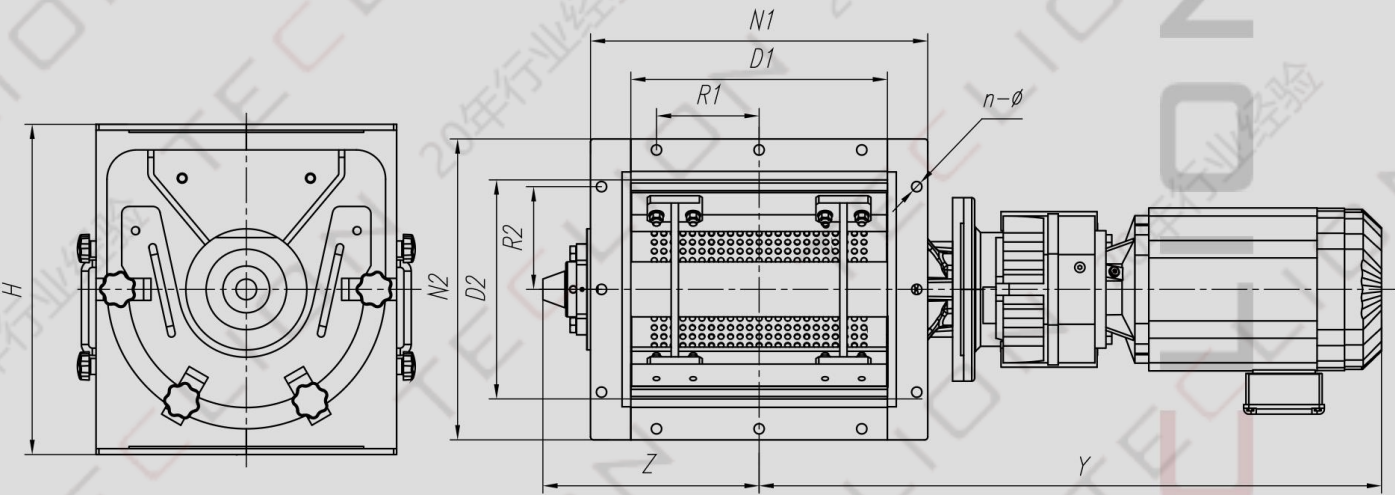

BM	Inlet/Outlet				Other dimensions						不含驱动
	D1	D2	R1	R2	N1	N2	H*	Z	Y	n-Φ	Wt. Kg
200X200	200	200	85	85	300	300	300	225	790	12-Φ14	120
300X350	350	300	140	140	460	410	450	295	850	12-Φ14	150
300X530	530	300	150	140	640	410	450	385	955	14-Φ14	165
300X800	800	300	150	140	910	410	450	520	1090	18-Φ14	190

* 尺寸约有0~+1%偏差

Without drive