




粉块打散破块标准型

- 低耗高效，打散速度快
- 可更换锯齿叶轮，破碎率更高
- 有效破碎粒度0-12mm
- 适用温度 ≤250℃
- 本体材质：不锈钢、碳钢
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域

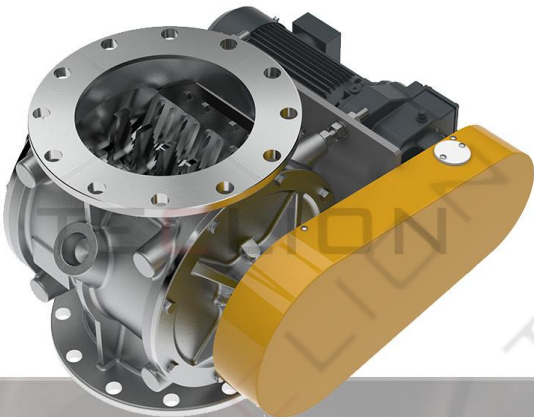


REGULAR LUMP BREAKER FOR POWDERS CHUNK

- Low consumption and high efficiency, fast breaking speed
- Replaceable sawtooth blade, higher crushing rate, better uniformity
- Suitable for all powder chunk, crushing size 0-10mm
- Suitable for differential pressure up to 1.0bar
- Temperature range: up to 250℃
- Materials of construction: stainless steel or carbon steel
- Flange drillings available to PN10, ANSI 150lbs
- Air purge seal
- Usable in Ex-zone



处理能力基于含湿量不超过20%粉块
Capacity based on the water content of not more than 20% powder chunk

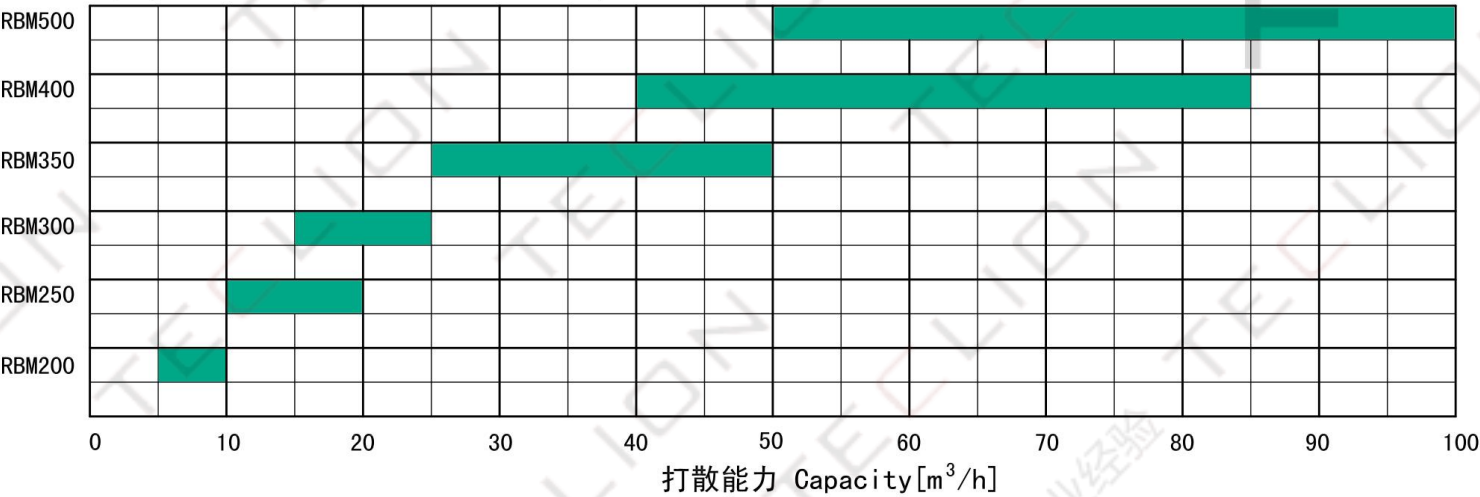


特殊配置

- 打散机构喷涂碳化钨
- 可配轴端测速传感器
- 轴端气封

OPTIONS AND ACCESSORIES

- Wear protection
- Speed sensor
- Gas purge seal

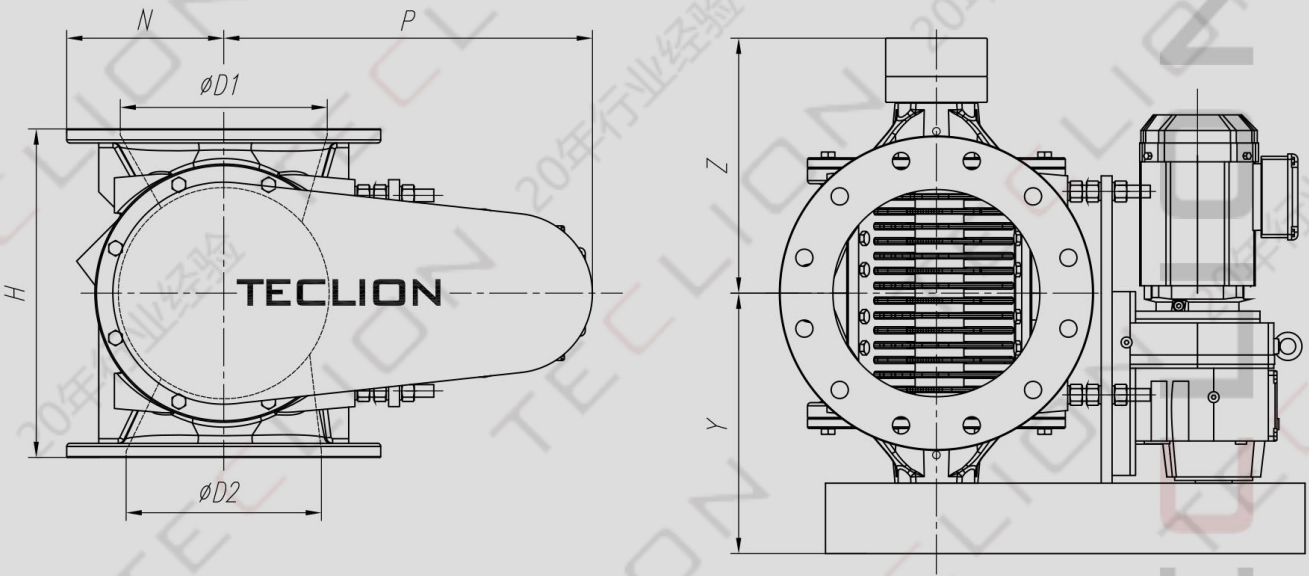

	Inlet/Outlet				Other dimensions				不含驱动
	DN	ANSI	$\phi D1$	$\phi D2$	* H	N	Y	Z	Wt. Kg
RBM200	200	8"	210	200	390	342	674	318	110
RBM250	250	10"	265	250	450	402	730	343	160
RBM300	300	12"	316	300	490	485	800	383	230
RBM350	350	14"	360	350	600	535	937	458	375
RBM400	400	16"	410	400	750	600	996	503	495

* 尺寸约有0~+1%偏差