
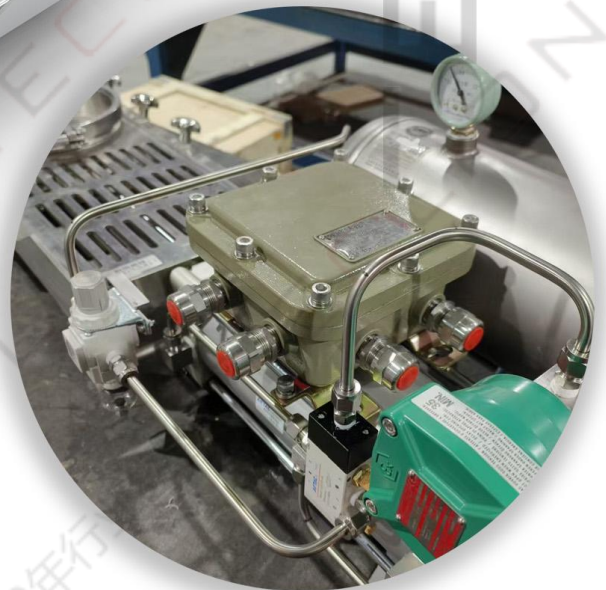


粉末或颗粒方法兰/孔板式

- 定制口径
- 四边镶嵌密封条
- 适用温度 -20 to +120°C
- 本体材质: 不锈钢
- GFL 驱动暗杆设计
- GFL 全包围铝合金防护罩
- GFL 凸轮式滚轮
- GOL 快拆设计
- 适用于防爆区域

SQUARE/WYE-LINE GATE VALVE FOR POWDERS AND GRANULAR PRODUCTS

- Custom size
- Seal on four sides
- Product temperature range from -20 to +120°C
- Materials of construction: stainless steel
- Non-rising stem(GFL)
- Fully enclosed aluminum shield, dust proof(GFL)
- Cam-type roller(GFL)
- Quick disassembling(GOL)
- Usable in Ex-zone

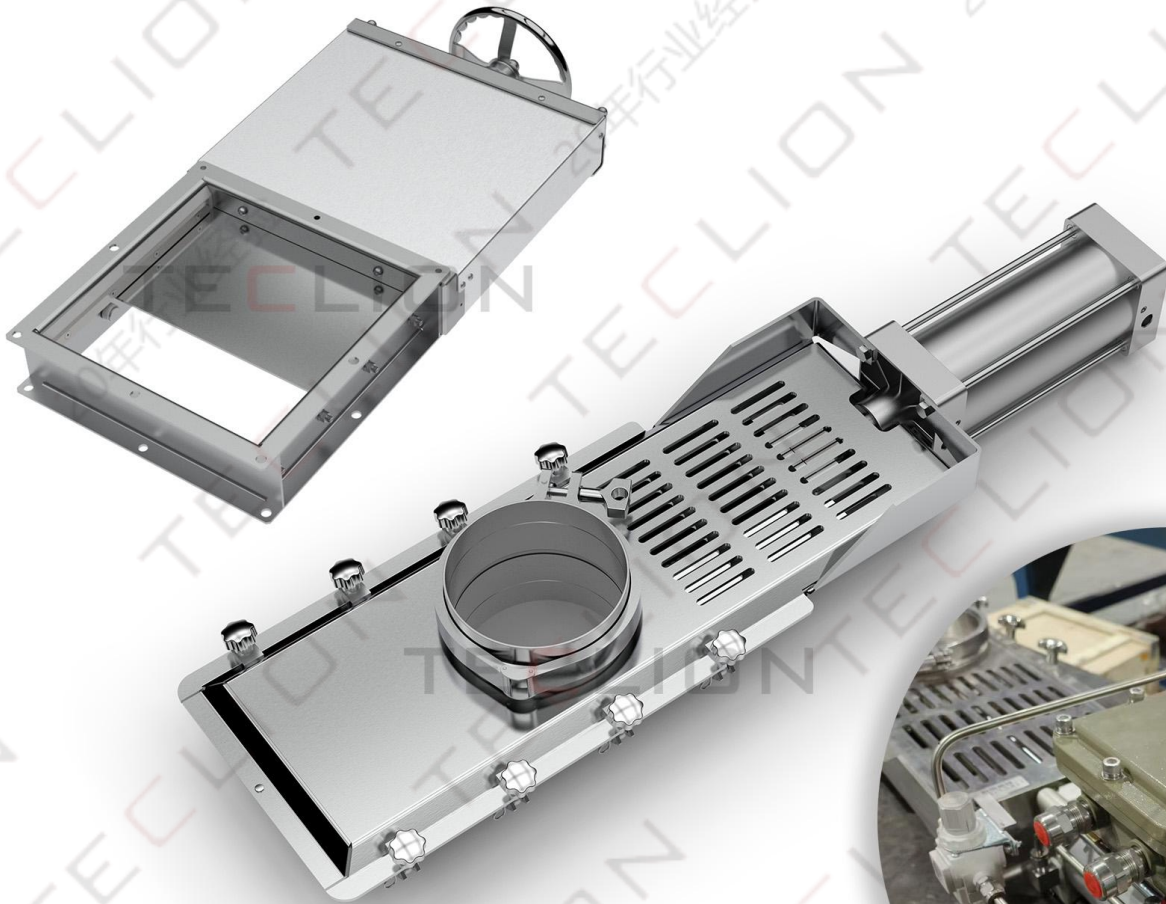

- 口径: DN100,DN150,DN200,DN250,DN300,DN350
或方口, 定制。