




### 粉末或颗粒单通道球式

- 夹角45°,三口弹性补偿密封
- 可用于密相输送管线任意位置
- 全通径设计
- 适用温度 -20 to +120°C
- 适用压力 6.0barg
- 本体材质: 不锈钢、碳钢
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域

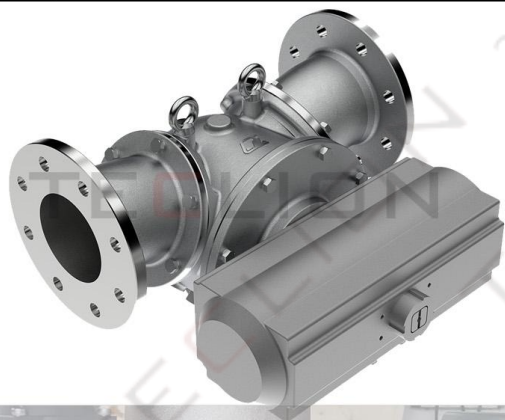


### SINGLE CHANNEL BALL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS


- Elastic sealing ring at each part
- Smooth and gap-free transition due to patented design of inlet, outlet
- Easily visible rotary plug mechanical direction indicator
- Product temperature range from -20 to +120°C
- Suitable for dilute phase pressure up to 6.0barg
- Materials of construction: stainless steel or carbon steel
- Flange drillings available to PN10,ANSI 150lbs
- Suitable for dense phase conveying
- Usable in Ex-zone



直通 Straight through

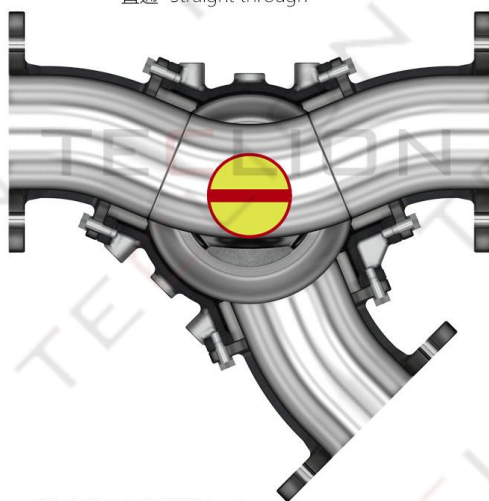

旁通 Diverted

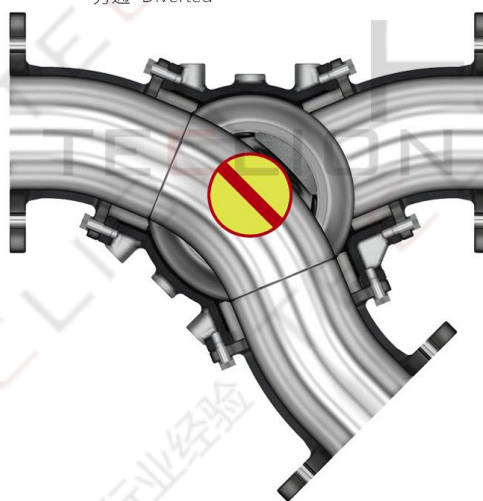


\* 剖面图仅展示通道流向 Section shows only the direction of the pas-

特殊配置


- 内腔与物料接触部位可镜面抛光、脱脂处理
- 内腔可喷涂陶瓷、喷涂碳化钨
- 可选电伴热
- 可选电动，手动
- 可选快速清洁
- 可选驱动左置（从进料口方向看去）
- 可选硬密封

OPTIONS AND ACCESSORIES

- Mirror polishing, degreasing treatment
- Wear protection
- Electric heating cable for the body
- Electric or manual drive
- Quick cleaning
- Actuator on the left-hand side
- Metal seal

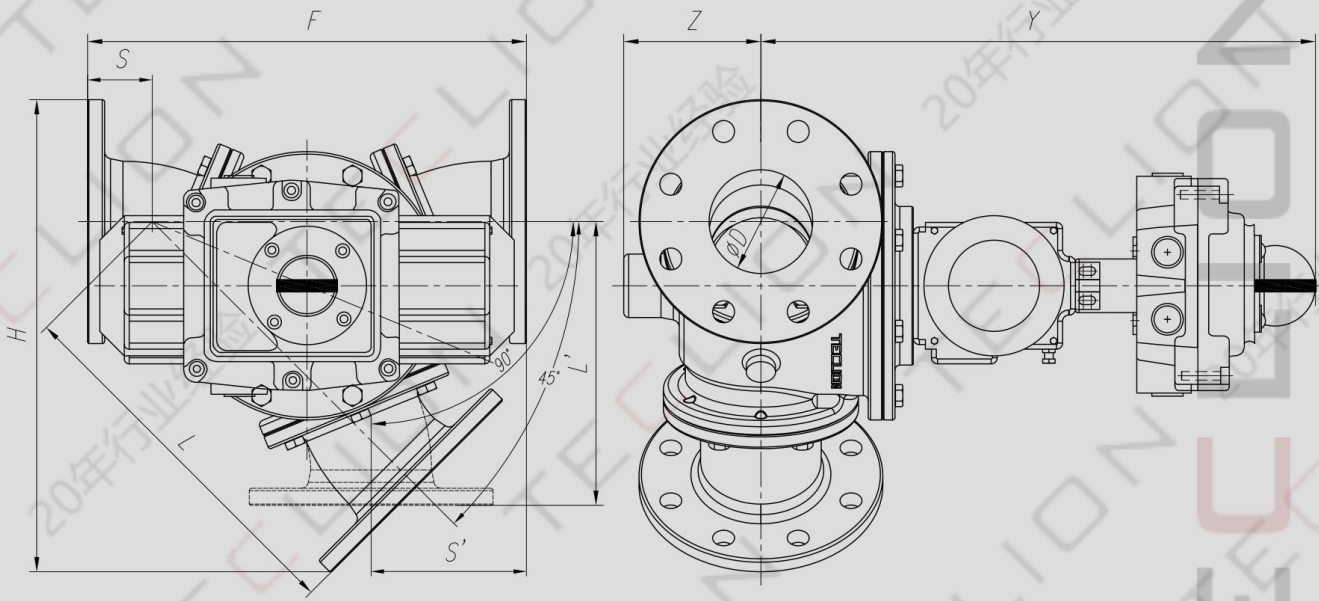

|        | Inlet/Outlet |      |     | Other dimensions |      |     |     |     |     |     |     | 气动     |
|--------|--------------|------|-----|------------------|------|-----|-----|-----|-----|-----|-----|--------|
|        | DN           | ANSI | ΦD  | H                | F *  | S   | L   | S'  | L'  | Z   | Y   | Wt. Kg |
| DBK50  | 50           | 2"   | 54  | 327              | 320  | 56  | 264 | 117 | 203 | 100 | 420 | 40     |
| DBK65  | 65           | 2.5" | 68  | 343              | 320  | 56  | 264 | 117 | 203 | 108 | 430 | 45     |
| DBK80  | 80           | 3"   | 85  | 388              | 360  | 53  | 307 | 127 | 233 | 113 | 440 | 50     |
| DBK100 | 100          | 4"   | 110 | 468              | 460  | 76  | 384 | 166 | 294 | 137 | 485 | 65     |
| DBK125 | 125          | 5"   | 134 | 557              | 560  | 77  | 483 | 196 | 364 | 154 | 525 | 110    |
| DBK150 | 150          | 6"   | 162 | 644              | 660  | 89  | 571 | 230 | 430 | 168 | 560 | 165    |
| DBK200 | 200          | 8"   | 210 | 771              | 800  | 123 | 677 | 285 | 515 | 202 | 626 | 330    |
| DBK250 | 250          | 10"  | 265 | 962              | 1030 | 155 | 875 | 366 | 664 | 230 | 675 | 370    |
| DBK300 | 300          | 12"  | 312 | 1109             | 1140 | 157 | 983 | 399 | 741 | 265 | 740 | 730    |

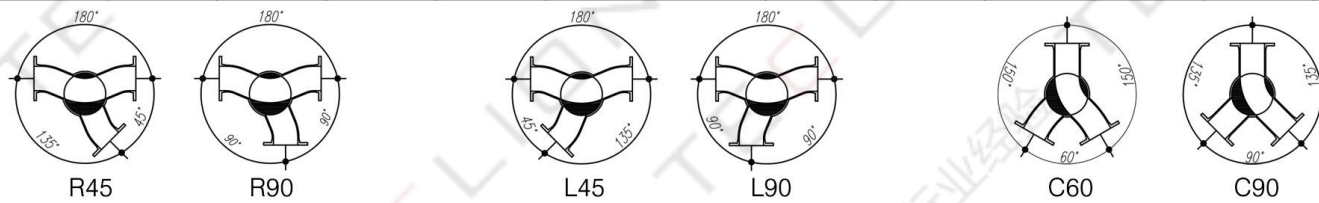

\* 尺寸约有0~+1%偏差