




粉末或颗粒摆动板

- 标配夹角60°(V)可带料切换
- 四边密封条, 防止粉末侧漏
- 快拆设计, 可在线维护
- 适用温度 -20 to +250°C
- 适用压力 ATM
- 本体材质: 不锈钢、碳钢
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域




FLAP DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS



- Gravity flow
- 60° outlet(V)
- Suitable for gravity flow, reliable sealing
- Allow with material operation
- Smooth design of inlet, outlet
- Easily visible rotary plug mechanical direction indicator
- Product temperature range from -20 to +120°C
- Materials of construction: stainless steel or carbon steel
- Flange drillings available to PN10, ANSI 150lbs
- Usable in Ex-zone
- Valve positioner is optional

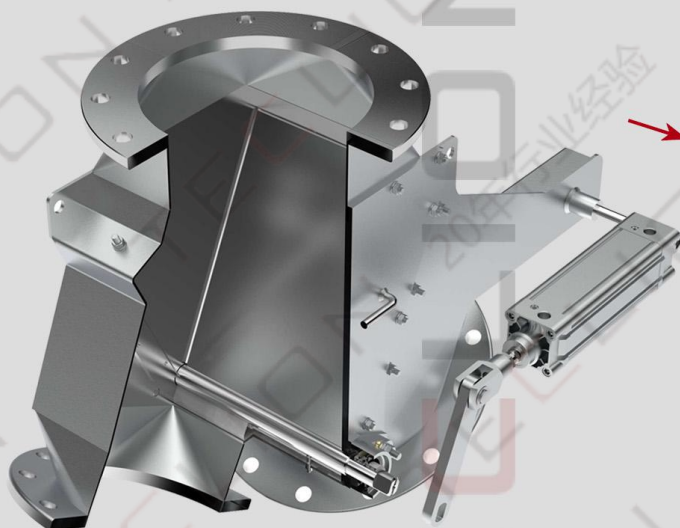

左通 Diverted left



右通 Diverted right

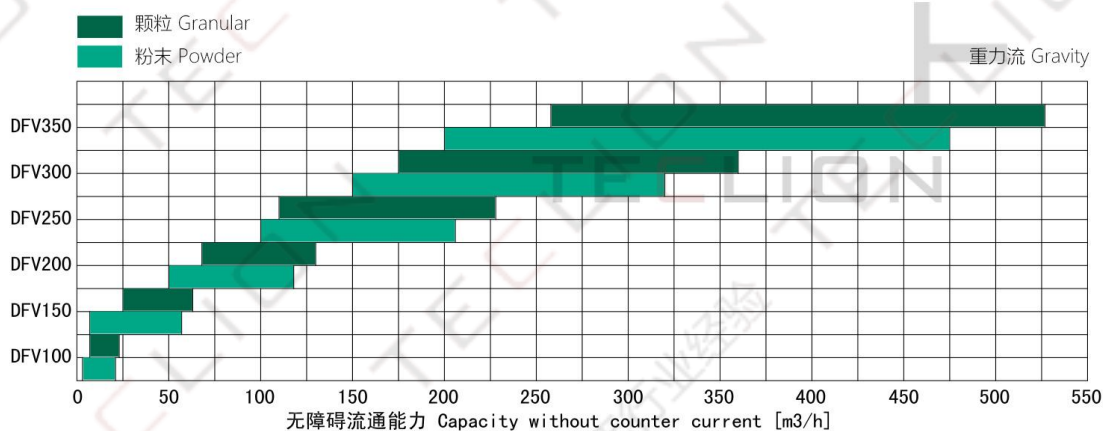

* 剖面图仅展示通道流向 Section shows only the direction of the passage