




粉末或颗粒单通道柱塞式

- 夹角45°，双边通道指示
- 弹性组合密封，可用于稀相管线任意位置
- 通道平滑无起伏，无死角
- 适用温度 -20 to +120°C
- 适用压力 1.5barg
- 本体材质：不锈钢、碳钢
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域

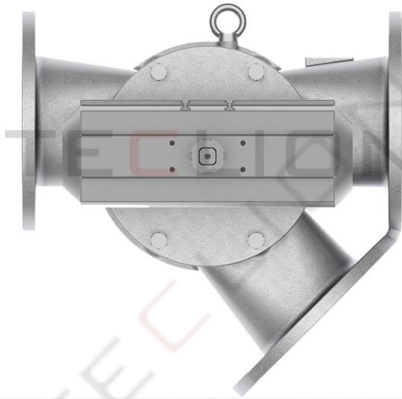


SINGLE CHANNEL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS


- With sealed rotor and 45° outlet, two channel indications
- Flexible combination seal can be used in any position of dilute phase
- Smooth and gap-free transition due to patented design of inlet, outlet
- Easily visible rotary plug mechanical direction indicator
- Product temperature range from -20 to +120°C
- Suitable for dilute phase pressure up to 1.5barg
- Materials of construction: stainless steel or carbon steel
- Flange drillings available to PN10, ANSI 150lbs
- Usable in Ex-zone



直通 Straight through

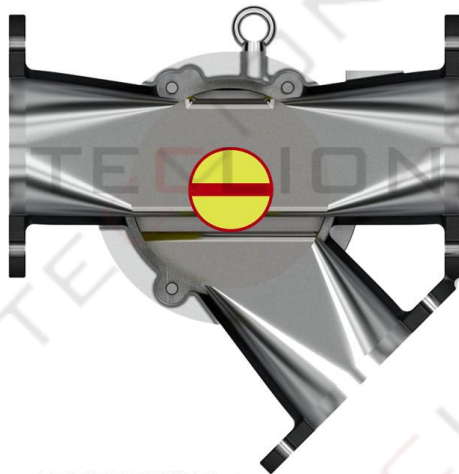

旁通 Diverted

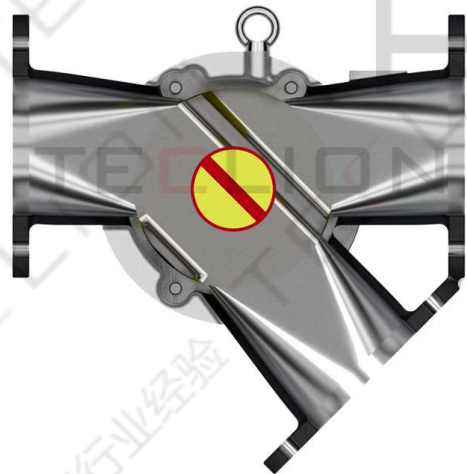


* 剖面图仅展示通道流向 Section shows only the direction of the passage

特殊配置

- 内腔与物料接触部位可镜面抛光、脱脂处理
- 内腔可喷涂陶瓷、喷涂碳化钨
- 可选电伴热
- 可选电动，手动
- 可选快速清洁
- 可选驱动左置（从进料口方向看去）

OPTIONS AND ACCESSORIES

- Mirror polishing, degreasing treatment
- Wear protection
- Electric heating cable for the body
- Electric or manual drive
- Quick cleaning
- Actuator on the left-hand side

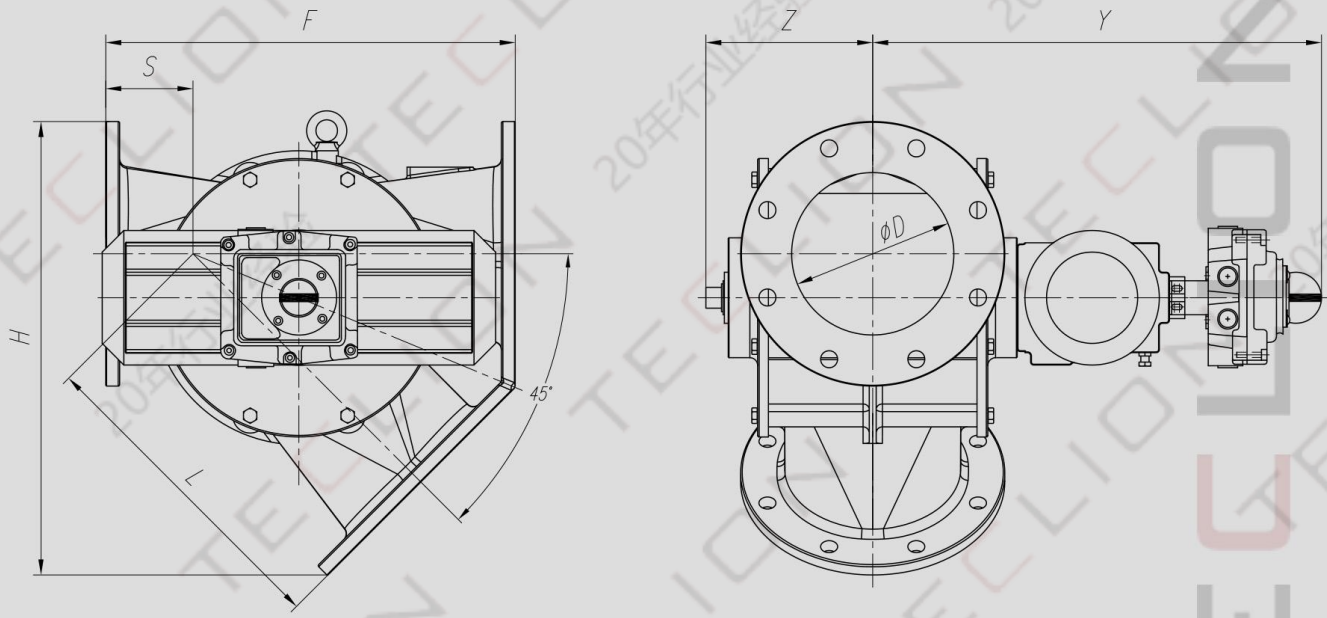

mm

	Inlet/Outlet		Other dimensions							气动
	DN	ANSI	ΦD	H	F *	S	L	Z	Y	Wt. Kg
DK50	50	2"	54	285	270	66	204	106	380	20
DK65	65	2.5"	68	320	300	74	226	110	410	26
DK80	80	3"	85	350	360	108	252	120	420	33
DK100	100	4"	110	400	390	101	289	144	445	55
DK125	125	5"	134	440	430	114	316	150	450	62
DK150	150	6"	162	490	460	108	352	190	520	92
DK200	200	8"	210	590	530	112	418	222	565	145
DK250	250	10"	265	710	680	161	519	245	600	200
DK300	300	12"	312	840	750	149	601	278	665	340
DK350	350	14"	350	915	800	152	648	297	705	450

* 尺寸约有0~+1%偏差