



粉末或颗粒摆锤式

- 肘管耐磨原理，适用于高研磨性物料
- 适用温度 -50 to +250°C
- 适用压力 6.0 barg
- 本体材质：铸铁
- 法兰压力等级 PN10, ANSI 150 lbs
- 适用于防爆区域





PENDULUM DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS

- Wear-protected diverter valve for abrasive products
- Easily visible rotary plug mechanical direction indicator
- Online maintenance
- Product temperature range from -50 to +250°C
- Suitable for dilute phase pressure up to 6.0 barg
- Materials of construction: cast iron
- Flange drillings available to PN10, ANSI 150 lbs
- Suitable for dilute and dense phase conveying
- Usable in Ex-zone



直通 Straight through

旁通 Diverted

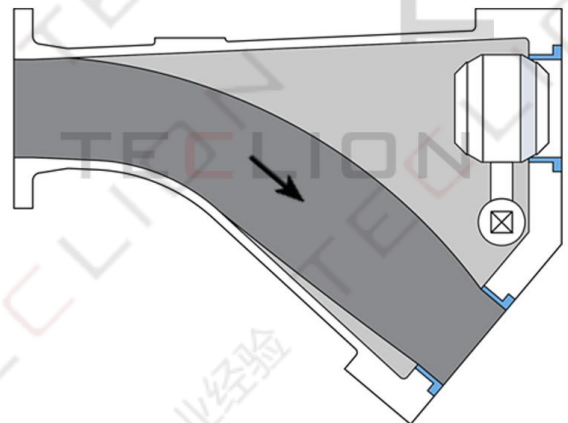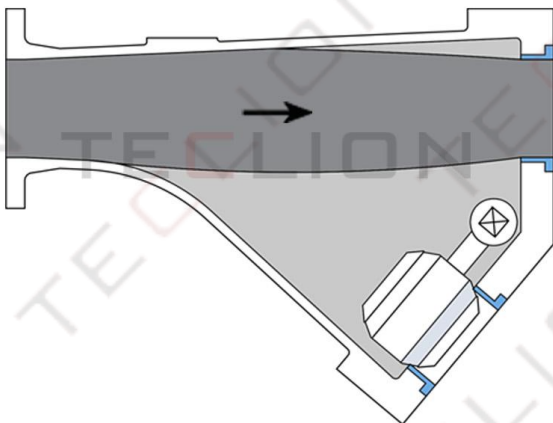


特殊配置

- 选配三种材质密封圈，应对不同工况
- 选配陶瓷阀座
- 选配带料切换
- 可选电动，手动
- 可选驱动左置（从进料口方向看去）

OPTIONS AND ACCESSORIES

- Three kinds of sealing rings to cope with different working conditions
- Ceramic seat
- Switchable with product(if required)
- Electric or manual drive
- Actuator on the left-hand side

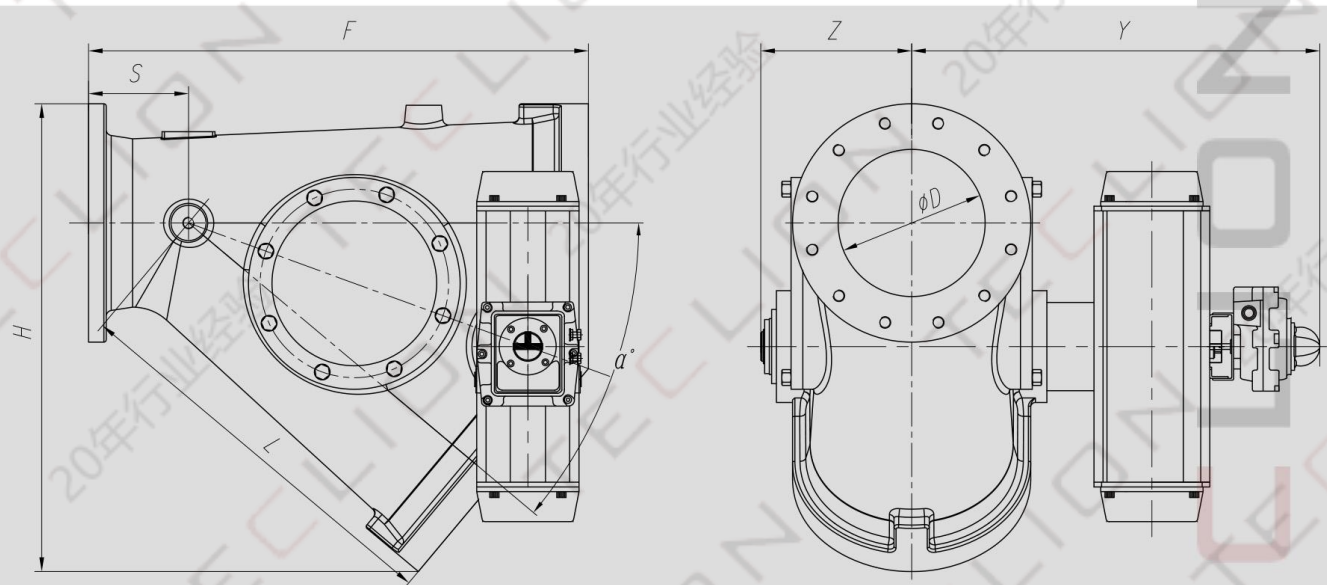

	Inlet/Outlet			Other dimensions							气动
	DN	ANSI	ΦD	H	F *	S	L	Z	Y	α°	Wt. Kg
DP50	50	2"	50	285	500	140	360	132	460	40	60
DP65	65	2.5"	65	350	500	140	360	140	500	40	88
DP80	80	3"	80	350	500	140	360	140	500	40	90
DP100	100	4"	100	400	570	180	390	145	525	40	105
DP125	125	5"	125	440	700	225	475	160	570	40	130
DP150	150	6"	150	490	780	240	540	175	590	40	205
DP200	200	8"	200	590	810	160	650	200	615	40	300
DP250	250	10"	250	710	850	170	680	257	705	40	450
DP300	300	12"	300	840	1120	370	750	297	745	40	520
DP350	350	14"	350	915	1250	385	865	315	795	40	620

* 尺寸约有0~+1%偏差