



粉末或颗粒单通道柱塞式

- 夹角90°, 双边通道指示
- 弹性组合密封, 可用于稀相管线任意位置
- 通道平滑无起伏, 无死角
- 适用温度 -20 to +120°C
- 适用压力 1.5barg
- 本体材质: 不锈钢、碳钢
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域




SINGLE CHANNEL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS


- With sealed rotor and 90° outlet,two channel indications
- Flexible combination seal can be used in any position of dilute phase
- Smooth and gap-free transition due to patented design of inlet,outlet
- Easily visible rotary plug mechanical direction indicator
- Product temperature range from -20 to +120°C
- Suitable for dilute phase pressure up to 1.5barg
- Materials of construction:stainless steel or carbon steel
- Flange drillings available to PN10,ANSI 150lbs
- Usable in Ex-zone



直通 Straight through

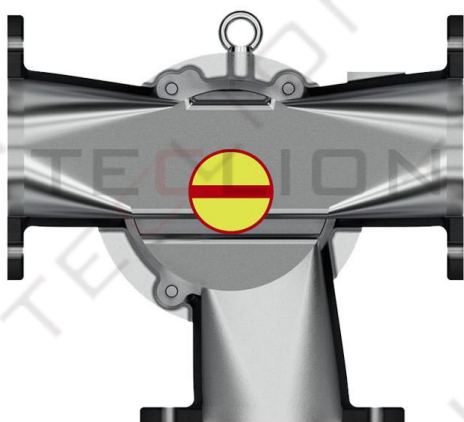

旁通 Diverted

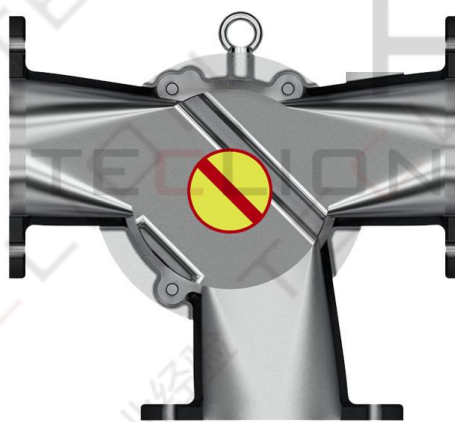


* 剖面图仅展示通道流向 Section shows only the direction of the passage

特殊配置

- 内腔与物料接触部位可镜面抛光、脱脂处理
- 内腔可喷涂陶瓷、喷涂碳化钨
- 可选电伴热
- 可选电动，手动
- 可选快速清洁
- 可选驱动左置（从进料口方向看去）

OPTIONS AND ACCESSORIES

- Mirror polishing, degreasing treatment
- Wear protection
- Electric heating cable for the body
- Electric or manual drive
- Quick cleaning
- Actuator on the left-hand side

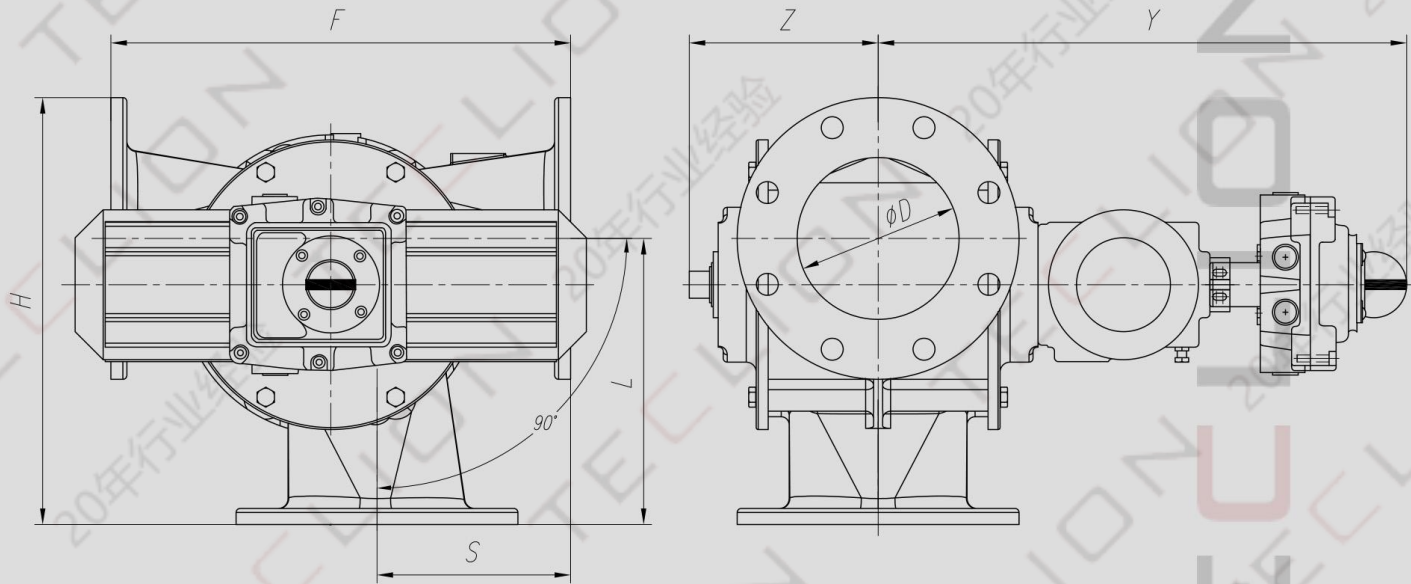

	Inlet/Outlet			Other dimensions						气动
	DN	ANSI	ΦD	H	F *	S	L	Z	Y	Wt. Kg
DT50	50	2"	54	260	270	142	178	106	380	20
DT65	65	2.5"	68	290	300	154	196	110	410	26
DT80	80	3"	85	315	360	164	216	120	420	33
DT100	100	4"	110	360	390	177	243	144	445	55
DT125	125	5"	134	390	430	180	260	150	450	62
DT150	150	6"	162	430	460	194	286	190	520	92
DT200	200	8"	210	510	530	223	337	222	565	145
DT250	250	10"	265	615	680	266	414	245	600	200
DT300	300	12"	312	720	750	310	480	278	665	340
DT350	350	14"	350	780	800	326	515	297	705	450

* 尺寸约有0~+1%偏差