




粉末或颗粒柱塞式全通径

- 夹角45°阀芯密封
- 通道全通径，无死角
- 流向指示简洁明了
- 适用温度 -20 to +120°C
- 适用压力 5.0barg
- 本体材质：塑料、不锈钢
- 法兰压力等级 PN10,ANSI 150lbs
- 可用于密相输送管线任意位置
- 适用于防爆区域

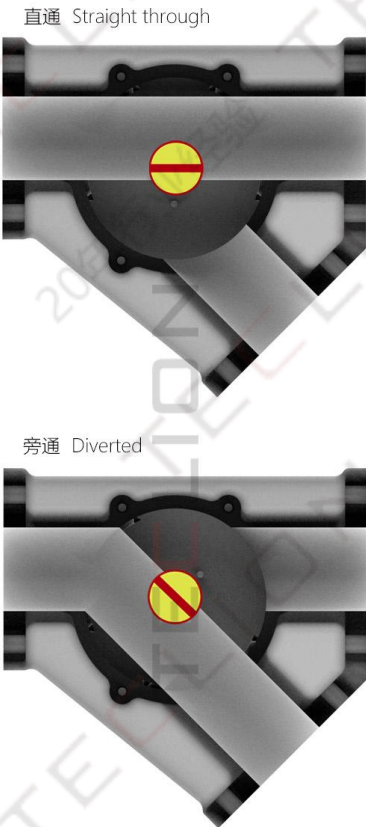

★ 剖面图仅展示通道流向
Section shows only the direction of the passage

SINGLE CHANNEL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS

- With sealed rotor and 45° outlet
- In cylindrical design with pressure assisted seals
- Smooth and gap-free transition due to patented design of inlet,outlet
- Easily visible rotary plug mechanical direction indicator
- Product temperature range from -20 to +120°C
- Suitable for dilute phase pressure up to 5.0 barg
- Materials of construction:plastic,stainless steel
- Flange drillings available to PN10,ANSI 150lbs
- Suitable for dense phase conveying
- Usable in Ex-zone



Size	50	65	80	100	125	150	200	250
------	----	----	----	-----	-----	-----	-----	-----