



粉末或颗粒单通道

- 夹角60°，双边通道指示
- 弹性组合密封，可用于稀相管线任意位置
- 通道平滑无起伏，无死角
- 适用温度 -20 to +120°C
- 适用压力 1.5barg
- 本体材质：不锈钢、碳钢
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域



SINGLE CHANNEL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS

- With sealed rotor and 60° outlet,two channel indications
- Flexible combination seal can be used in any position of dilute phase
- Smooth and gap-free transition due to patented design of inlet,outlet
- Easily visible rotary plug mechanical direction indicator
- Product temperature range from -20 to +120°C
- Suitable for dilute phase pressure up to 1.5barg
- Materials of construction:stainless steel or carbon steel
- Flange drillings available to PN10,ANSI 150lbs
- Usable in Ex-zone

左通 Diverted left




右通 Diverted right



颗粒 Granular
粉末 Powder

重力流 Gravity

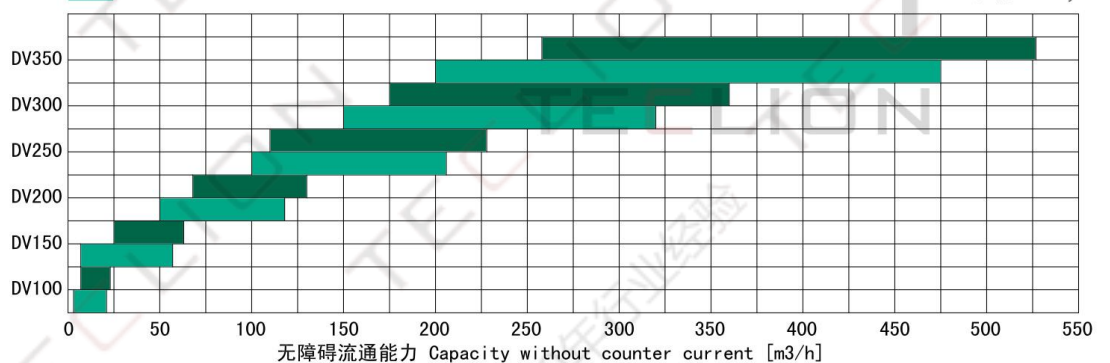



* 剖面图仅展示通道流向 Section shows only the direction of the passage

特殊配置

- 内腔与物料接触部位可镜面抛光、脱脂处理
- 内腔可喷涂陶瓷、喷涂碳化钨
- 可选电伴热
- 可选电动，手动
- 可选快速清洁
- 可选驱动左置（从进料口方向看去）

OPTIONS AND ACCESSORIES

- Mirror polishing, degreasing treatment
- Wear protection
- Electric heating cable for the body
- Electric or manual drive
- Quick cleaning
- Actuator on the left-hand side

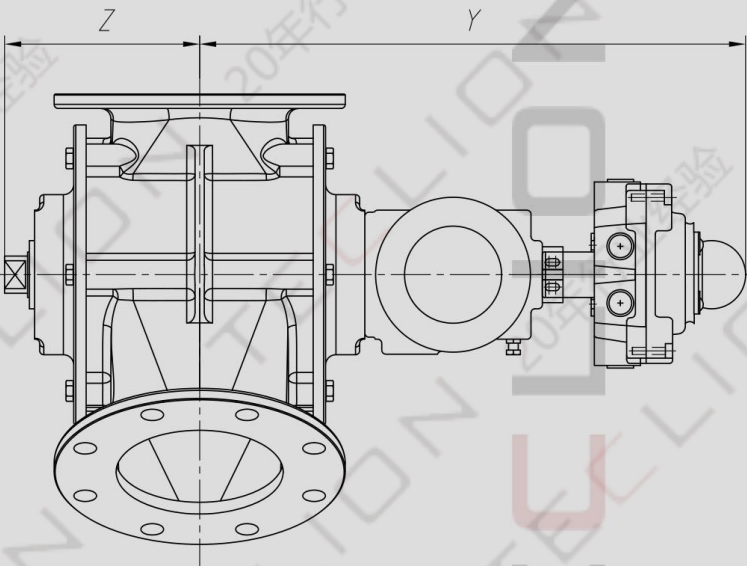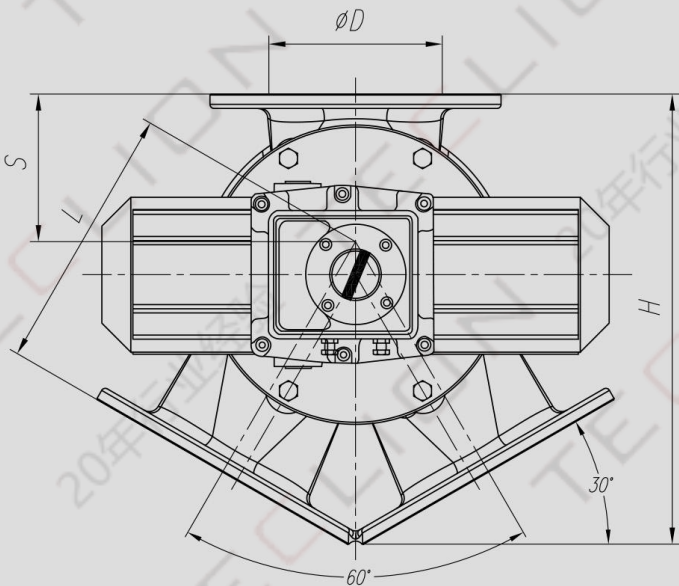

	Inlet/Outlet			Other dimensions					气动
	DN	ANSI	ΦD	H	S	L	Z	Y	Wt. Kg
DV100	100	4"	110	356	115	212	144	445	SS 50
DV150	150	6"	162	436	143	258	190	520	80
DV200	200	8"	210	530	180	305	222	565	130
DV250	250	10"	265	624	202	370	245	600	180
DV300	300	12"	312	792	291	438	278	665	300