


粉末或颗粒孔板式换向

- 高分子聚合物夹层式补偿
- 物料进出口畅通无阻碍
- 全通路设计
- 外部无可造成危险的运动部件
- 物料进出口可调换使用，换向或汇聚
- 可用于稀相气力输送或重力卸料
- 可水平或竖直安装
- 可选配2、3、4个出料口
- 充气式密封圈（可选）
- 可带料切换
- 本体材质：不锈钢
- 适用温度 -20 to +120°C
- 适用于防爆区域

WYE-LINE DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS

- Compensating hard polymer seals
- Unobstructed opening
- Full round pass-through design
- No additional safety device necessary as there are no moving parts outside
- Diverts or converges material flow
- Dilute phase pneumatic conveying (pressure or vacuum) or gravity flow
- Horizontal or vertical valve orientation
- Available in 2, 3, or 4-way configurations
- Serviceable while in-line
- Product temperature range from -20 to +120°C
- Materials of construction:stainless steel
- Usable in Ex-zone

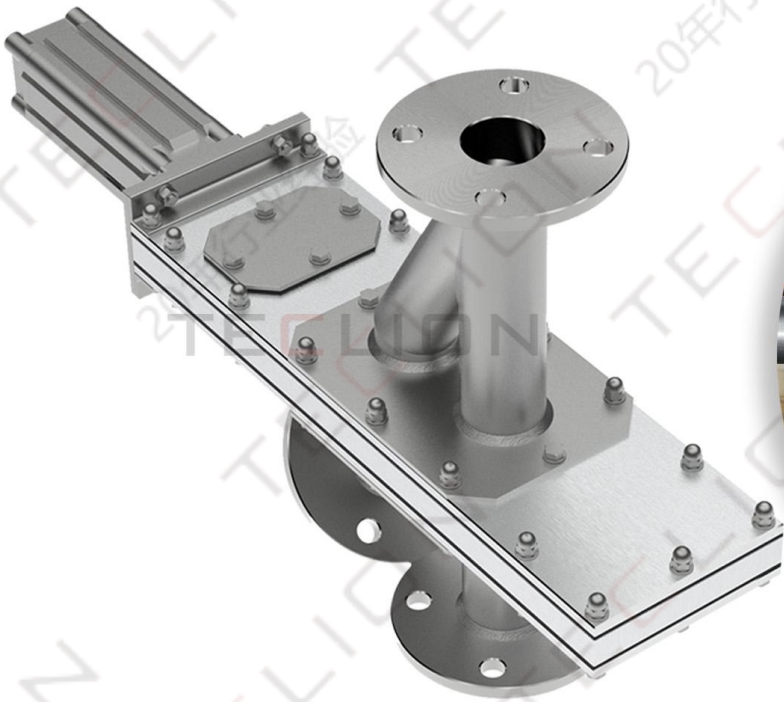

Size	50	65	80	100	125	150	200	250
------	----	----	----	-----	-----	-----	-----	-----