




粉末介质卸料和计量直吹型

- 大流通截面，适用于易吸附、流动性差的物料
- 适用于气力输送，免料靴，安装空间更小
- 适用压差 1.5bar
- 适用温度 250℃
- 本体材质：不锈钢、铸铁
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域




BLOW-THROUGH VALVE FOR POWDERS


- Large inlet for high capacities
- For feeding pneumatic conveying systems
- Suitable for differential pressure up to 1.5bar
- Temperature range: up to 250℃
- Materials of construction: stainless steel or cast iron
- Flange drillings available to PN10,ANSI 150lbs
- Operation possible without leakage gas venting
- Usable in Ex-zone and as protection system
- Suitable for low bulk density, easily adsorbed powder
- Saving installation space

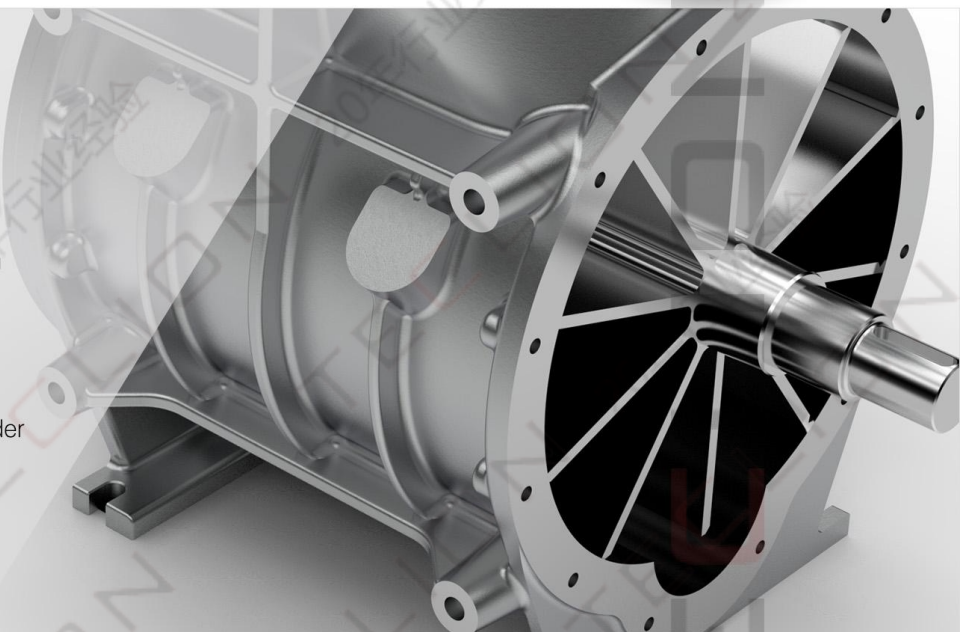

理论输送能力 * at 100% filling
绿色区域内选择最经济 Choose the most economical within the green zone

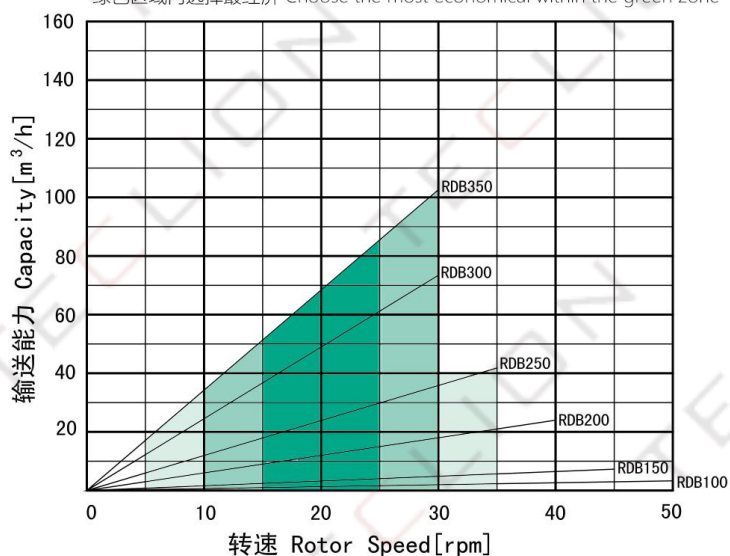

Class I 60°C max.speed Air leakage is reduced by half when loading
带料时漏气量减半

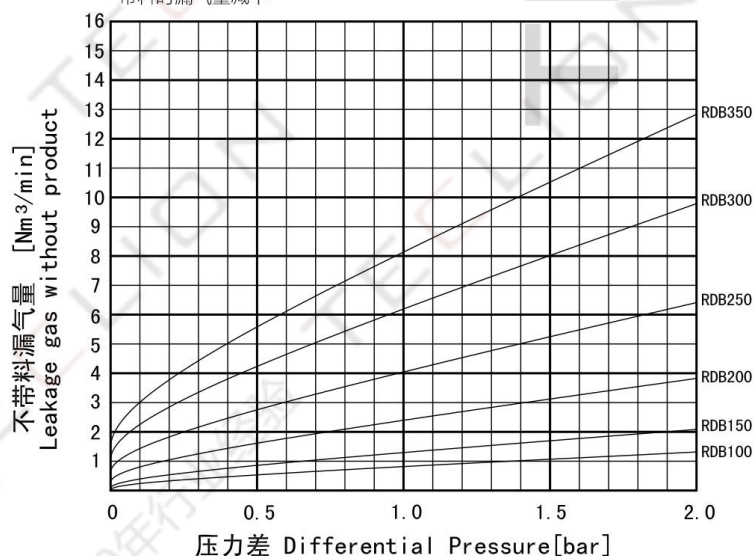


特殊配置

- 可搭配多种形式转子应对不同特性介质和工况
- 内腔与物料接触部位可镜面抛光、脱脂处理
- 与物料接触部位做耐磨处理
- 可选伴热夹套、电伴热
- 进料口可镶刀片
- 可选导轨快速清洗结构，结构同RDC
- 可选适用粉块或易碎颗粒

OPTIONS AND ACCESSORIES

- Different working conditions, different rotor type
- Mirror polishing, degreasing treatment
- Wear protection
- Electric or steam heating for the body
- Knife at the product inlet
- Quick cleaning structure
- Optional for powder blocks or fragile pellet

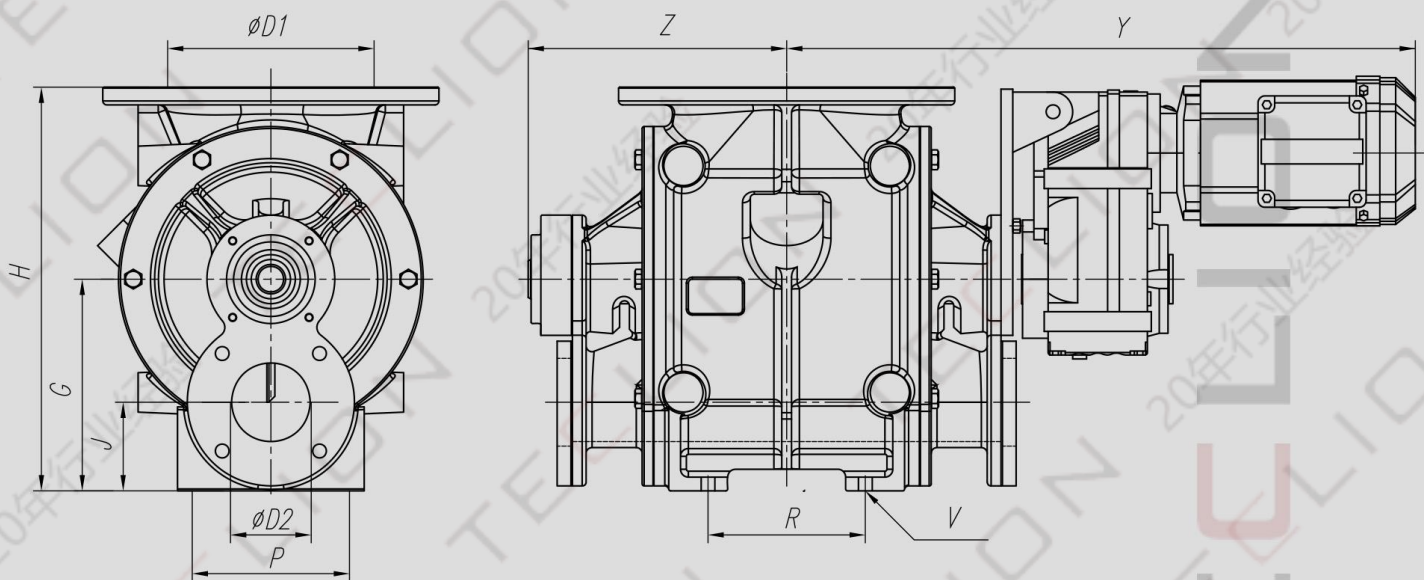

	Inlet/Outlet				Other dimensions								不含驱动
	DN	ANSI	ΦD1	ΦD2	H *	G	J	Y* *	Z	P	R	V	Wt. Kg
RDB100	100	4"	110	40	230	140	76	527	235	75	80	4xΦ10	30
RDB150	150	6"	162	50	295	155	65	601	255	110	100	4xΦ12	55
RDB200	200	8"	213	80	410	215	90	714	300	160	160	4xΦ14	110
RDB250	250	10"	272	100	470	245	100	769	325	170	200	4xΦ14	160
RDB300	300	12"	322	125	565	295	120	847	382	190	260	4xΦ18	270
RDB350	350	14"	360	150	635	335	132	938	440	220	310	4xΦ18	390

* 尺寸约有0~+1%偏差

* * 减速机座号不同尺寸也将不同

Without drive