





粉末介质卸料和计量经济型

- 高填充率
- 适用压差 0.6bar
- 适用温度 250°C
- 本体材质: 不锈钢、碳钢
- 法兰压力等级 PN10, ANSI 150lbs
- 适用于防爆区域

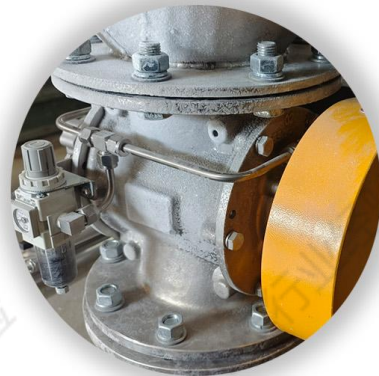


ECONOMICAL DISCHARGING AND METERING-VALVE FOR POWDERS

- High capacities
- Suitable for differential pressure up to 0.6bar
- Temperature range: up to 250°C
- Materials of construction: stainless steel or carbon steel
- Flange drillings available to PN10, ANSI 150lbs
- Usable in Ex-zone

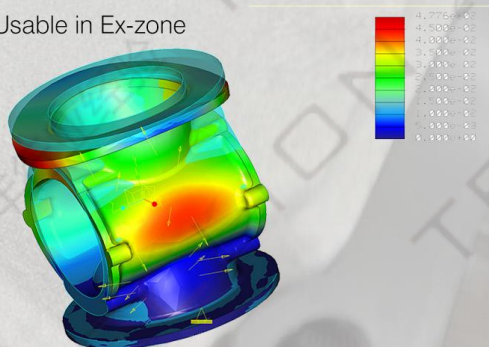


理论输送能力 * at 100% filling

绿色区域内选择最经济 Choose the most economical within the green zone

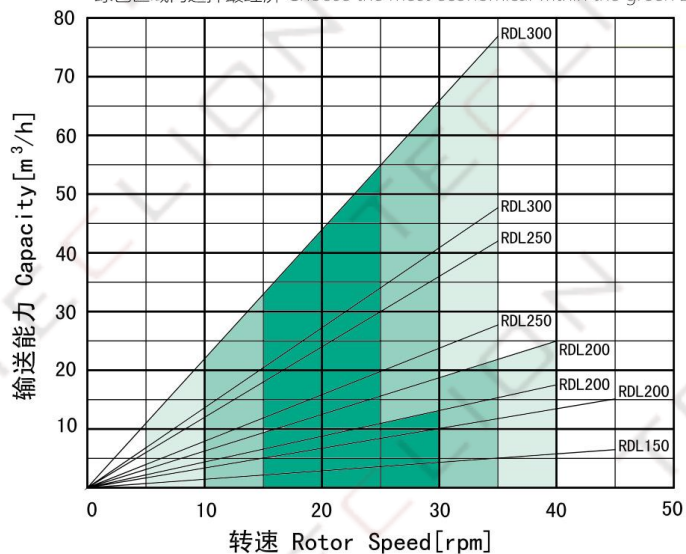

Class 3 max.speed Air leakage is reduced by half when loading
带料时漏气量减半

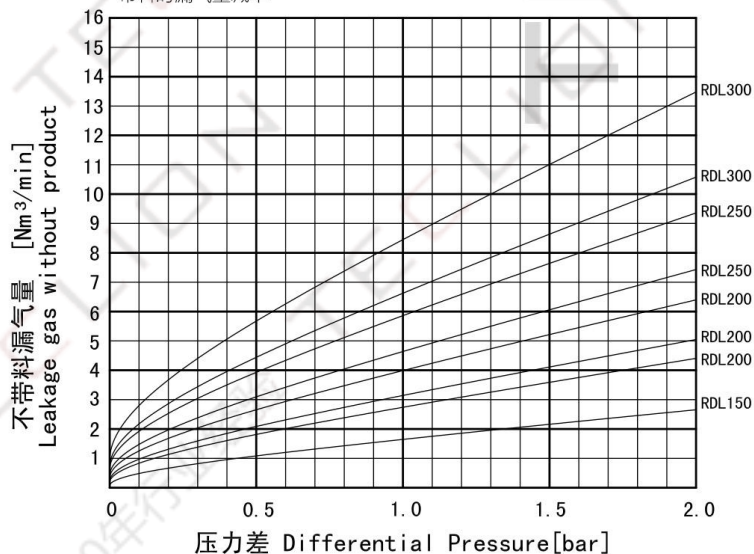


特殊配置

- 可搭配多种形式转子应对不同特性介质和工况
- 内腔与物料接触部位可镜面抛光、脱脂处理
- 与物料接触部位做耐磨处理
- 可选适用粉块或易碎颗粒

OPTIONS AND ACCESSORIES

- Different working conditions, different rotor type
- Mirror polishing, degreasing treatment
- Wear protection
- Optional for powder blocks or fragile pellet

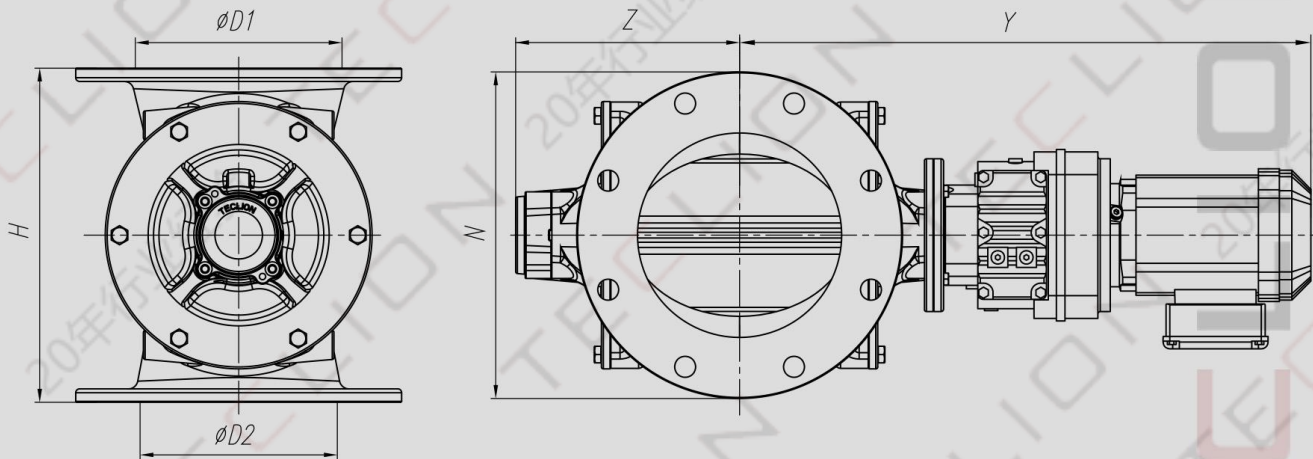

	Inlet/Outlet				Other dimensions				不含驱动
	DN	ANSI	$\phi D1$	$\phi D2$	H *	N	Y * *	Z	Wt. Kg
RDL150	150	6"	160	150	260	282	510	195	40
RDL200	200	8"	210	200	320	342	620	230	73
RDL200	200	8"	210	200	340	342	620	230	80
RDL200	200	8"	210	200	390	342	620	260	105
RDL250	250	10"	260	250	400	402	650	260	125
RDL250	250	10"	260	250	450	402	650	260	140
RDL300	300	12"	310	300	450	485	750	300	190
RDL300	300	12"	310	300	540	485	750	300	220

* 尺寸约有0~+1%偏差
 * * 减速机座号不同尺寸也将不同
Without drive