



### 粉末介质卸料和计量微型


- 卫生场合
- 内外表面均抛光处理，防止物料积存
- 易拆卸式转子
- 适用压差 1.0bar
- 本体材质：不锈钢
- 标准卡箍ISO/BPE/3A/KF、法兰连接PN6
- 适用于防爆区域




### DISCHARGING AND METERING-VALVE FOR POWDERS

- For high hygienic standards
- Highly polished surfaces in-and outside to avoid product deposits
- Easy detachable rotor
- Suitable for differential pressure up to 1.0bar
- Materials of construction: stainless steel
- Standard clamp ISO/BPE/3A/KF and flange PN6
- Usable in Ex-zone

理论输送能力 \* at 100% filling  
绿色区域内选择最经济 Choose the most economical within the green zone

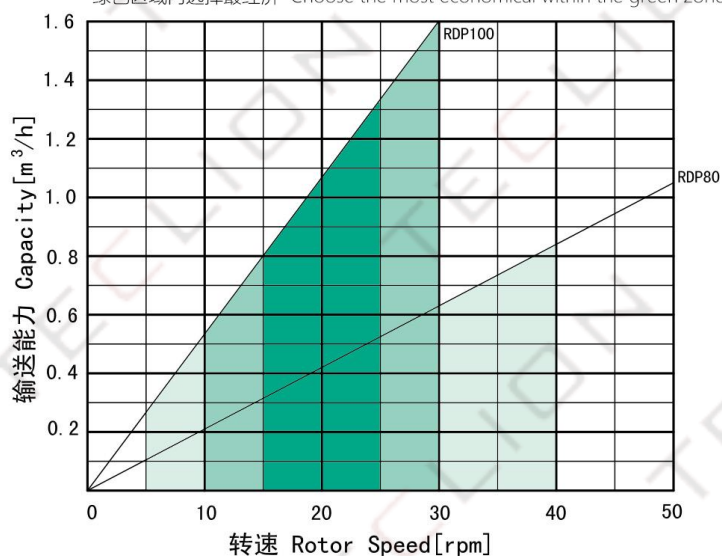

Class I 60°C max.speed Air leakage is reduced by half when loading  
带料时漏气量减半


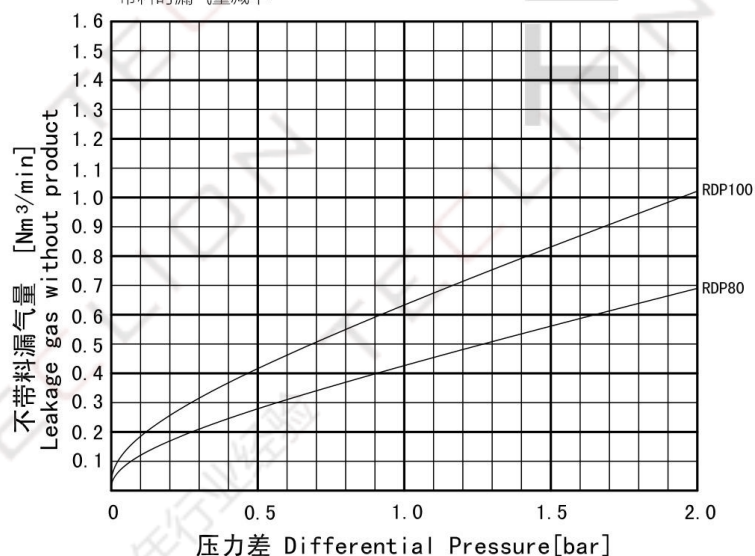


特殊配置

- 内腔与物料接触部位脱脂处理
- 内腔可喷涂绝缘陶瓷
- 可选超高压 $\geq 1.0\text{MPa}$
- 可配轴端测速传感器，信号转换器
- 可选适用粉块或易碎颗粒

OPTIONS AND ACCESSORIES

- Mirror polishing, degreasing treatment
- Wear protection
- Optional ultra-high pressure  $\geq 1.0\text{MPa}$
- Speed sensor, signal converter
- Optional for powder blocks or fragile pellet

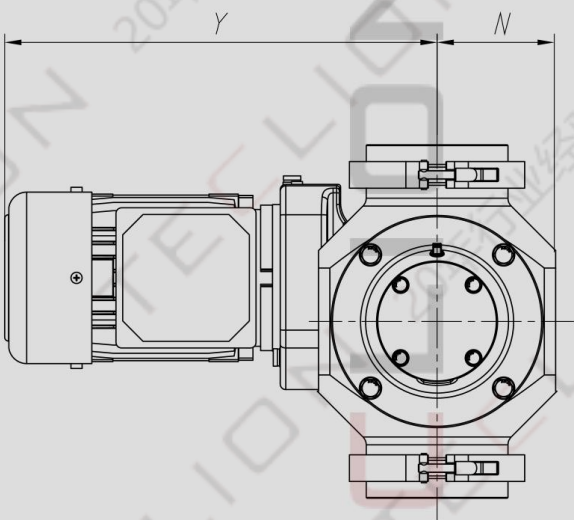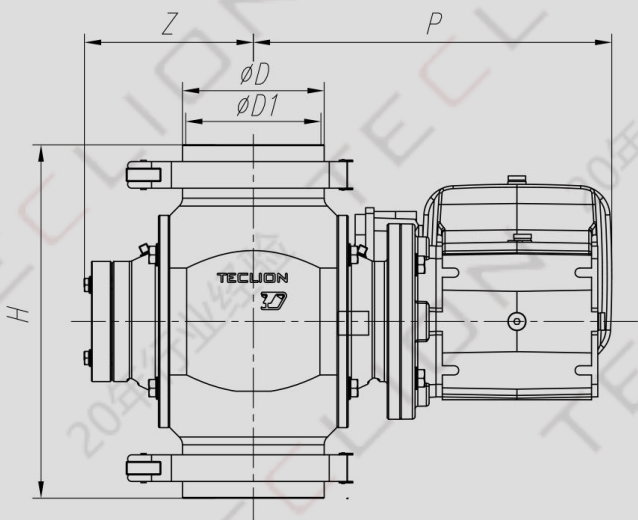

|        | Inlet/Outlet |      |          |           | Other dimensions |     |    |     |     | 不含驱动   |
|--------|--------------|------|----------|-----------|------------------|-----|----|-----|-----|--------|
|        | DN           | ANSI | $\Phi D$ | $\Phi D1$ | H                | P * | N  | Y * | Z   | Wt. Kg |
| RDP80  | 80           | 3"   | 76.2     | 72.9      | 203              | 220 | 65 | 310 | 93  | SS 10  |
| RDP100 | 100          | 4"   | 101.6    | 97.4      | 253              | 258 | 85 | 310 | 121 | 22     |

\* 减速机座号不同尺寸也将不同      Without drive