



10 RDW & RDM

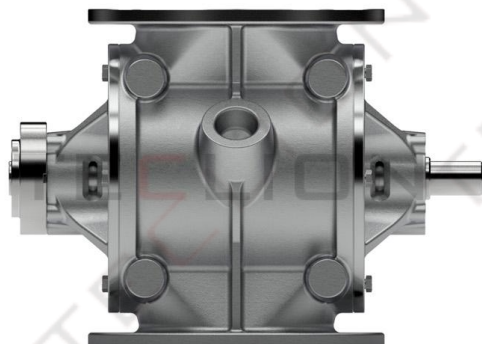

粉末介质卸料和计量标准型

- 大流通截面，高填充率
- 适用于气力输送
- 轴承外置，标配可靠的轴吹密封组件
- 适用压差 1.5bar
- 适用温度 250℃
- 本体材质：不锈钢、铸铁
- 法兰压力等级 PN10,ANSI 150lbs
- 适用于防爆区域

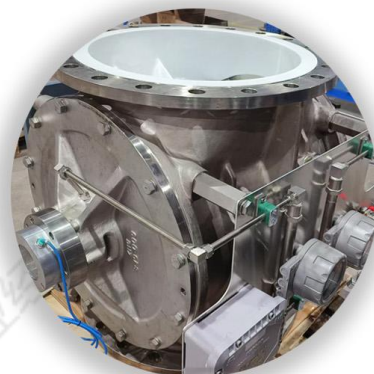


DISCHARGING AND METERING-VALVE FOR POWDERS


- Large cross section for high discharge capacities
- For feeding pneumatic conveying systems
- Separated from product by purged seal arrangement and drop out opening
- Suitable for differential pressure up to 1.5bar
- Temperature range: up to 250℃
- Materials of construction: stainless steel or cast iron
- Flange drillings available to PN10,ANSI 150lbs
- Usable in Ex-zone



理论输送能力 * at 100% filling
绿色区域内选择最经济 Choose the most economical within the green zone

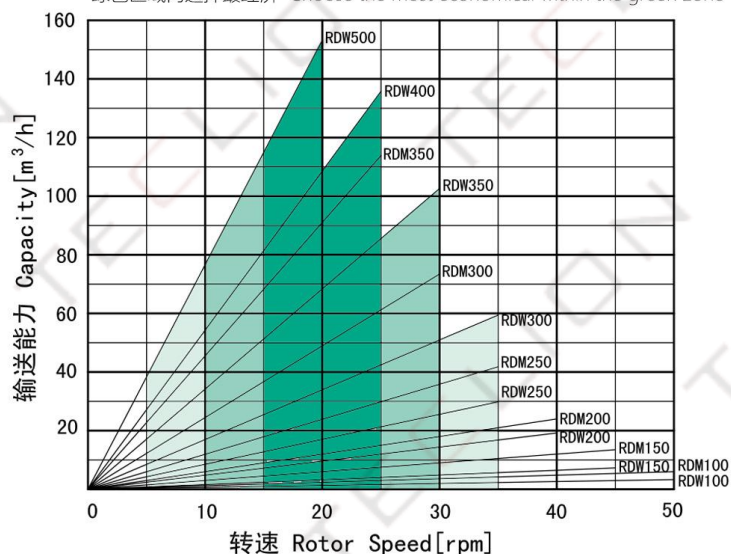

Class I 60℃ max.speed Air leakage is reduced by half when loading
带料时漏气量减半


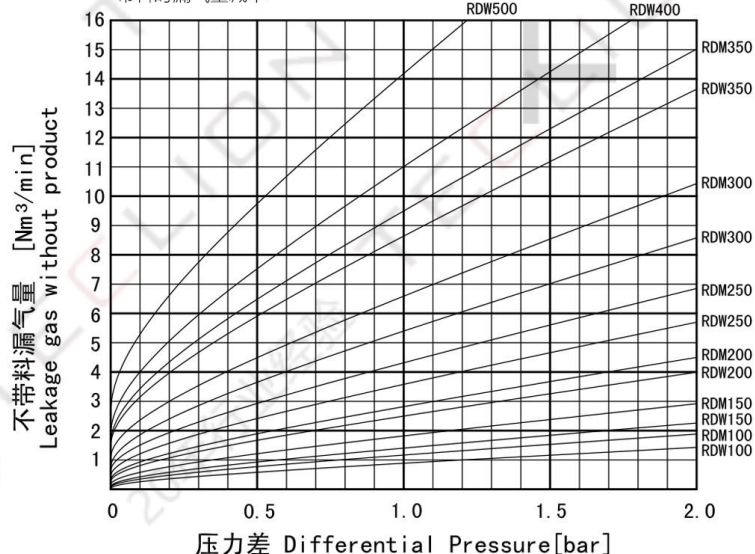


特殊配置

- 可搭配多种形式转子应对不同特性介质和工况
- 内腔与物料接触部位可镜面抛光、脱脂处理
- 与物料接触部位做耐磨处理
- 可选伴热夹套、电伴热，气力输送最高温度到250℃
- 进料口可镶刀片
- 壳体侧端可开平衡口
- 可选适用粉块或易碎颗粒

OPTIONS AND ACCESSORIES

- Different working conditions, different rotor type
- Mirror polishing, degreasing treatment
- Wear protection
- Electric or steam heating for the body, pneumatic conveying temperature can reach up to 250℃
- Knife at the product inlet
- Balance tube
- Optional for powder blocks or fragile pellet

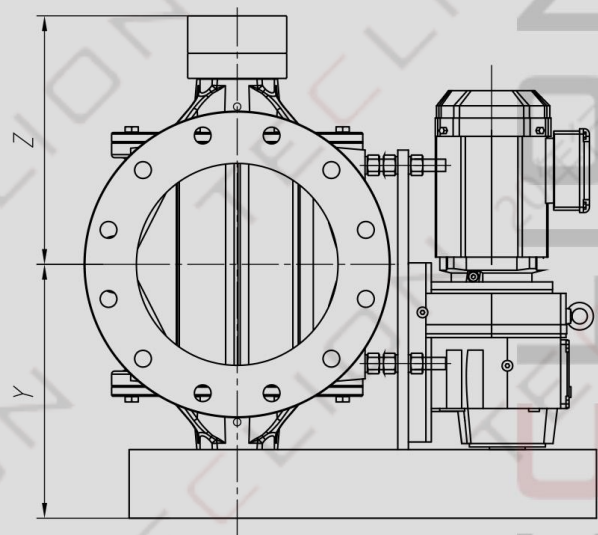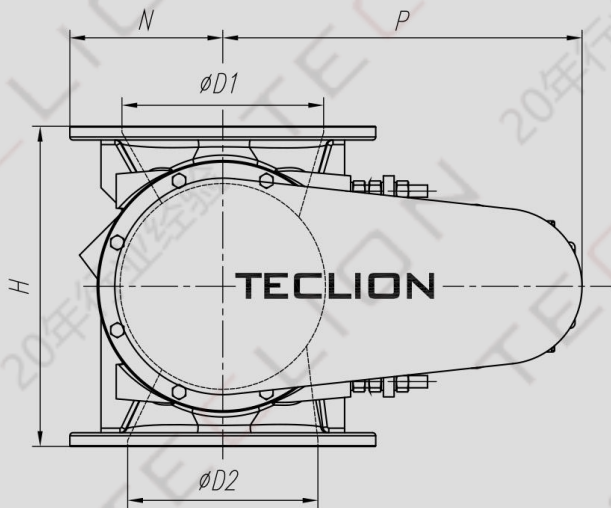

mm	Inlet/Outlet				Other dimensions					不含驱动
	DN	ANSI	ΦD1	ΦD2	H *	P	N	Y	Z	Wt. Kg
RDW100	100	4"	110	100	180	320	115	230	235	28
RDM100					270	345	115	230	235	33
RDW150	150	6"	162	150	280	420	141	250	255	50
RDM150					330	430	141	272	258	62
RDW200	200	8"	210	200	350	440	171	302	288	98
RDM200					390	455	171	308	300	110
RDW250	250	10"	265	250	420	470	201	333	325	155
RDM250					450	485	201	333	325	160
RDW300	300	12"	316	300	490	620	243	393	365	230
RDM300					540	690	243	410	382	270
RDW350	350	14"	360	350	600	740	268	470	440	375
RDM350					660	800	268	480	450	410
RDW400	400	16"	410	400	750	900	300	570	485	495
RDW500	500	20"	500	500	800	910	350	610	530	680

* 尺寸约有0~+1%偏差

Without drive