


粉粒介质卸料和计量高温型

- 适用于不高于800℃重力落料
- 配合夹套可适用于不高于250℃气力输送
- 可选配蒸汽、循环热油、电伴热带
- 适用压差：1.0bar
- 本体材质： 不锈钢， 钛合金
- 法兰压力等级 PN10,ANSI 150lbs

HIGH-TEMPERATURE VALVE FOR POWDERS OR GRANULAR PRODUCTS

- High temperature execution up to 800℃ for gravity flow
- High temperature execution up to 250℃ for feeding pneumatic conveying systems,heated housing
- Heating with steam or circulated thermo-oil inside the housing up to 220℃
- Suitable for differential pressure up to 1.0bar
- Materials of construction:stainless steel, titanium alloy
- Flange drillings available to PN10,ANSI 150lbs

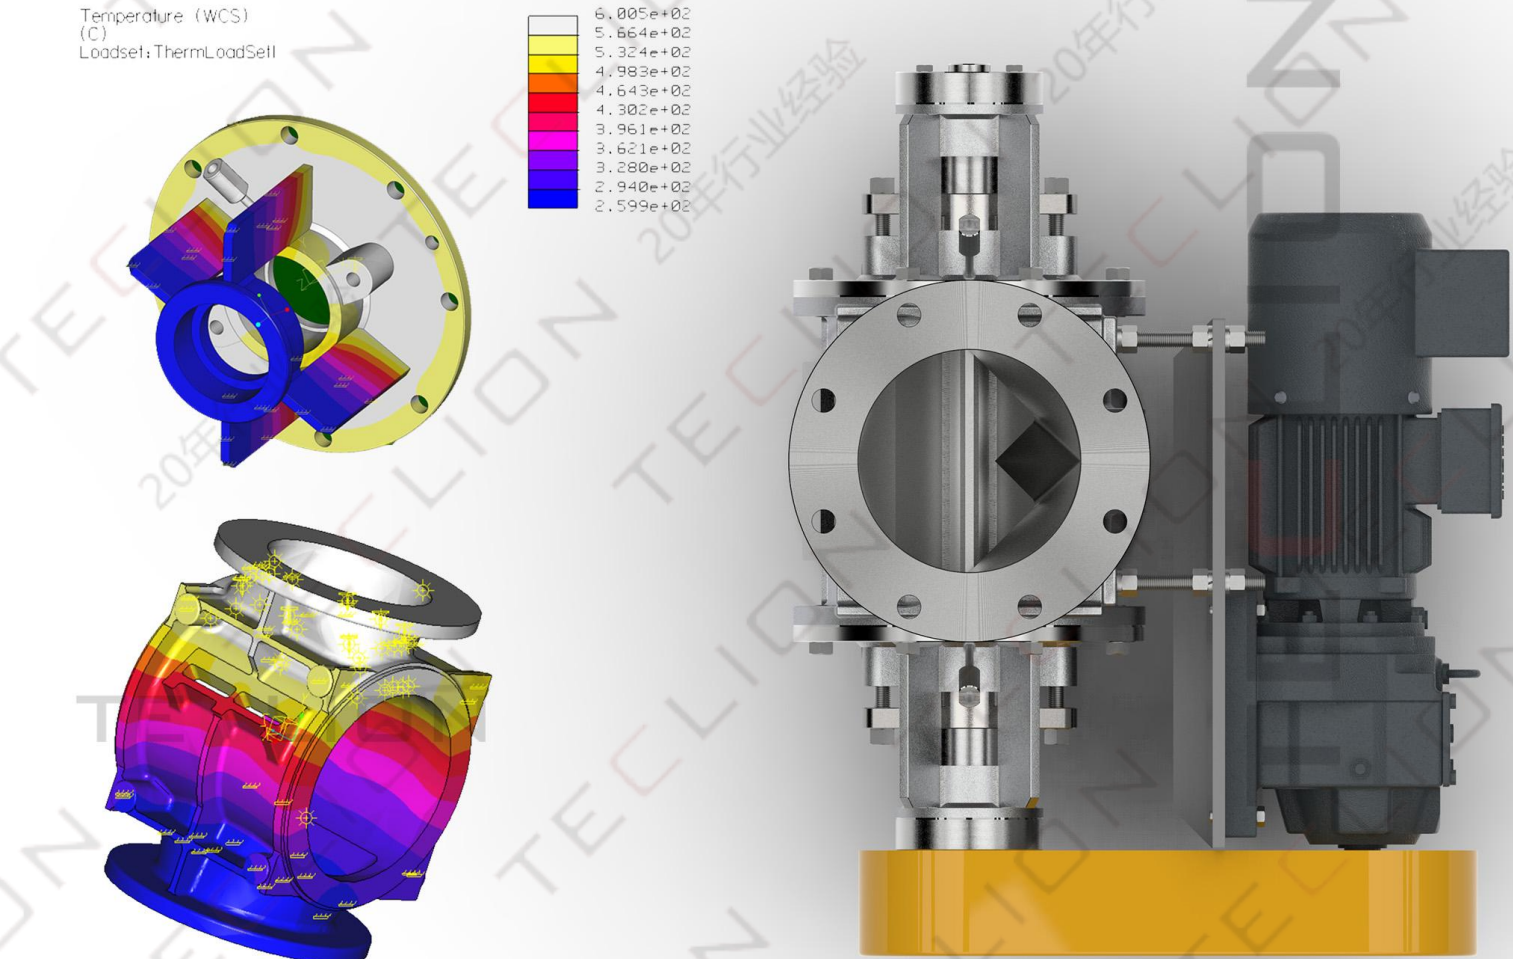

Size	100	150	200	250	300	350	400	500
Ltr/rev*	2	5	10	20	40	78	110	168

* at 100% filling